

SPECIFICATION SHEET

Federal Spec Medicine Cabinet




FEATURES/TYPICAL SPECIFICATIONS

- Recess mount installation
 - Wall Opening/Rough-in Dimensions: 14" x 34" x 31/2"
- Formed and welded steel housing (WB/ST)
 - 20 gauge steel with white, heat cured, acrylic paint finish
- Framed Mirror door
 - 3MM thick float glass mirror door front
 - Polished stainless steel frame (SS8)
 - 26 gauge steel door back with white, heat cured, acrylic paint finish
- 32" piano hinge with 90° stop welded to the door and mechanically fastened to the cabinet body (HG01) (1 typical)
- Magnetic door catch in the cabinet body aligns to a stainless steel striker plate on the door back (2 typical)
- Reversible for left-hand or right-hand door swing
- 5/32" thick glass shelves, adjustable (ADJ) (3 typical)
- Includes installation hardware
- Standard Pallet Quantity of 28 units

Meets Federal Specification #WW-P-541/8B

| FI | n | SI | ne | s: | |
|----|---|----|----|----|--|
| ы. | ~ | | n | | |

Housing: PT01-Basic White Mirror: Flat Mirror Frame: SS8-Polish Stainless Steel Trim

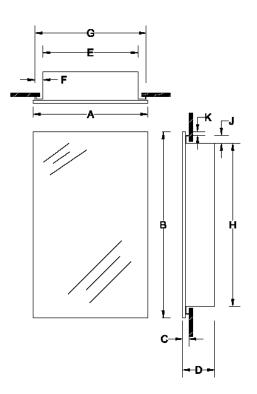

| | | | | Dimensions In Inches | | | | | | | | | |
|----------------|----------------------------|------|-------|----------------------|----|---------|-----|---|-----|-------|---|------|--|
| Model # | Description | | Α | В | С | D | Е | F | G | н | J | к | |
| 460P34CH | MEDCAB 1DR 16X36 SS8 WB/ST | | 161⁄8 | 361⁄8 | 1½ | 41⁄2 | 13½ | 1 | 15½ | 331⁄2 | 1 | 5/16 | |
| | | | | | | | | | | | | | |
| REFERENCE QTY. | | REMA | RKS | | | Project | | | | | | | |

| REFERENCE | QTY. | REMARKS | Project |
|-----------|------|---------|-------------------|
| | | | Location |
| | | | Architect |
| | | | Engineer |
| | | | Contractor |
| | | | Submitted by Date |

* All models and material specifications are subject to change or withdrawal without notice.