

SPECIFICATION SHEET

Styleline II MEDICINE CABINET



FEATURES/TYPICAL SPECIFICATIONS


- Surface Mount Installation
 - · Pre-drilled mounting holes
- Formed and welded steel housing (WB/ST)
 - 24 gauge steel construction with white, heat cured, acrylic paint finish
- · Framed mirror door
 - 1/8" thick float glass mirror door front with polished vertical edges
 - Polished chrome frame on top and bottom of mirror door (CH8)
 - 24 gauge steel, pan formed door back with white, heat cured, acrylic paint finish
- Magnetic catch in cabinet body flange aligns to stainless steel striker plate on the door (1 typical)
- 16" piano hinge with 90° stop welded to the door and mechanically fastened to the cabinet body (HG01) (1 typical)
- Right-hand door swing
- Built-in top light fixture with a chrome plated 24 gauge steel faceplate and polished chrome socket cups (typical 3). (Uses three incandescent 60 watt maximum, G style, 120V bulbs (I60G) - bulbs not included)
- 26 gauge galvanized steel shelves with white, heat cured, enamel paint finish, adjustable (ADJ) (3 typical)
- Includes installation hardware
- Pallet Quantity = 18 units

Finishes:

Housing: PT01—Basic White

Mirror: Flat Mirror with 2 Polished Edges

Frame: CH8—Polished Chrome

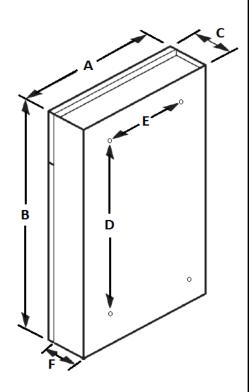

		Dimensions In Inches					
Model #	Description	Α	В	С	D	E	F
565	MEDCAB 1DR 18X28 CH8 WB/ST	18	28	4½	22%	11-11/16	3½

The "C" dimension is cabinet only without socket cups and bulbs.

REFERENCE	QTY.	REMARKS	Project		
			Location		
			Architect		
			Engineer		
			Contractor		
			Submitted by	Date	

^{*} All models and material specifications are subject to change or withdrawal without notice.